

Study on MMSE Interpolation Schemes Using Multiple Symbols

Jun-Ho Jo¹ and Seyeong Choi^{2*}

¹Network Strategy BU, KT

²Dept. of Information & Communication Eng., Wonkwang University

다중 심볼을 이용한 MMSE 보간 기법에 대한 연구

조준호¹, 최세영^{2*}

¹한국 통신

²원광대학교 정보통신공학과

Abstract This paper presents the idea of interpolating between multiple sounding bursts to estimate the individual channels of a MIMO scenario. The performance of the proposed technique depends on the $f_d T$ product and the number of transmit and receive antennas. In particular, this technique can be effective if the $f_d T$ product is not too high and the number of antennas is not too large. Furthermore, there is a considerable difference in the performance of the 16 channels in the 4x4 MIMO case because the sounding bursts spread farther apart with time, meaning that the Doppler in the channel causes a greater error for the channels.

요 약 본 연구에서는 MIMO 환경 하에서 모든 개별 채널을 추정하기 위해 다수의 사운딩 버스트 사이의 보간 기법을 이용한 아이디어를 제시한다. 제안된 기법의 성능은 $f_d T$ 값과 송수신단의 안테나 개수에 크게 의존하고 있으며 특히 본 연구를 통하여 제안된 기법은 $f_d T$ 값이 아주 크지 않거나 또는 안테나의 개수가 많지 않을 때 효과적임을 보인다. 또한 우리는 추정 채널의 개수와 안테나의 개수가 클 때는 사운딩 버스트들이 시간상에서 더 멀리 퍼져 있기 때문에 채널의 도플러 현상이 채널에 더 많은 오류를 유발할 수밖에 없으며 이로 인해 최상과 최악의 채널 추정 성능 차이가 더욱 커짐을 보인다.

Key Words : Interpolation, MIMO, MMSE

1. Introduction

We focus on the problem of channel estimation for multiple-input and multiple-output (MIMO) systems[1-4], using Orthogonal frequency-division multiplexing (OFDM)[5-7] sounding (or Pilot) signals, a critical component in many modern wireless communication systems. There can be two basic components to this

problem: Estimation of the channel parameters based upon observing the received sounding signal after passage through the channel; and optimum design of the sounding signal itself[8,9].

Applications include channel estimation for demodulating signals in data transmission, as well as for purposes of characterizing the outdoor channel in various locales.

This work was supported by Wonkwang University in 2013.

*Corresponding Author : Seyeong Choi(Wonkwang Univ.)

Tel: +82-63-850-6882 email: sychoi@wku.ac.kr

Received August 7, 2013

Revised (1st October 4, 2013, 2nd October 14, 2013)

Accepted December 5, 2013

Especially, we consider the Minimum Mean Square Estimation (MMSE)[10,11] of channel parameters based on a discrete time model of the time varying channel. We present the idea of interpolating between multiple sounding bursts in order to estimate all the individual channels of a MIMO scenario. From the simulation results, we show that this technique can be effective if the $f_d T$ product is not too high and the number of antennas in not too large.

2. Formulation of the MMSE Receiver for Channel Sounding

We formulate the MMSE receiver for channel sounding in the time domain. The results apply equally well whether we generate the signal directly in the time domain or use OFDM to generate it. We consider first a Single-input Single-output (SISO) time varying linear channel with impulse response $h(n, k)$. Our model of the second order statistics of the channel is that

$$E\{h(n, i)h^*(m, j)\} = C J_0(2\pi f_d T_s (n - m))e^{-i\alpha/L} \delta(i - j)$$

For notational convenience we let the input to the channel be $x^*(n)$, where the asterisk means complex conjugate transpose. Then the output can be written

$$y(n) = \sum_{k=0}^{L-1} h(n, k)x^*(n - k) + w(n)$$

or

$$y(n) = x^*(n)h(n) + w(n)$$

where $w(n)$ is white noise with zero mean and variance σ^2 .

3. MMSE Interpolation using multiple Symbols

Let $h_{ij}(n)$ (abbreviated as h_{ij} in the diagram below) denote the impulse response vector, at time n , from the j^{th} transmit antenna to the i^{th} receive antenna, and consider the following pattern of transmission and reception in which the various channels are measured in succession.

3.1 2x2 MIMO case

For illustration purposes we consider a 2 x 2 case in the diagram as shown in [Fig. 1].


We would like to measure the complete MIMO channel at a single time instant, n_0 . To discuss this, let us define the time origin $n=0$ as the first sample of the leftmost point in the diagram above. Assume that we wish to estimate $h_{ij}(n_0)$ where n_0 is chosen, for example, as shown in Fig. 1. Focusing first on the measurement of $h_{11}(n_0)$, the diagram in Fig. 2 highlights only those bursts of time in which the channel h_{11} is being probed.

The proposed technique uses the MMSE estimate of $h_{11}(n_0)$ based upon the measured received signal from some number, M_s , of sounding symbols surrounding the time instant, n_0 . In Fig. 2, for example, suppose that $M_s=4$. Then, $h_{11}(n_0)$ is estimated based upon the received signal samples during the four sounding symbols highlighted in the diagram. To be specific, suppose that each of the sounding symbols has a guard interval of length T_g samples followed by N samples for measurement. Each symbol is then $T_{sym}=T_g+N$ samples long and, according to the diagram, we are estimating h_{11} at the time $n_0=6T_{sym}$. The MMSE estimate of is based upon the received signal samples in the four intervals, $T_g+1 \leq n \leq T_{sym}$, $4T_{sym}+T_g+1 \leq n \leq 5T_{sym}$, $8T_{sym}+T_g+1 \leq n \leq 9T_{sym}$, and $12T_{sym}+T_g+1 \leq n \leq 13T_{sym}$.


If we next focus on the measurement of $h_{21}(n_0)$, the diagram in Fig. 3 highlights only those bursts of time in which the channel h_{21} is being probed.

In this case we estimate $h_{21}(n_0)$ based upon the received signal samples during the four sounding symbols highlighted in this diagram. The estimation of the other two channels is done similarly, as illustrated in the diagrams in [Fig. 4].


From the discussion above it can be seen that the only essential difference between the estimators for each of the four channels is the relative position of the point n_0 with respect to the sounding symbols in each case. In a time varying channel this will cause the estimation performance to be different for the different channel impulse responses. The channels for which the time n_0 is within, or close to, a sounding symbol for that channel should have better performance than those channels for which n_0 is farther from the sounding symbols for them.

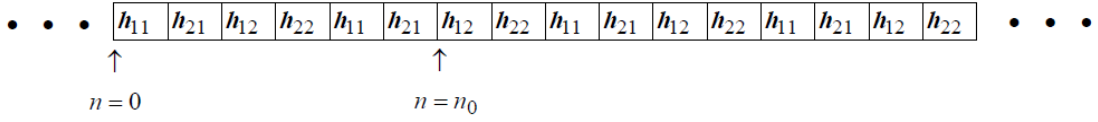



[Fig. 1] 2 x 2 MIMO case diagram (1)



[Fig. 2] 2 x 2 MIMO case diagram (2)



[Fig. 3] 2 x 2 MIMO case diagram (3)




[Fig. 4] 2 x 2 MIMO case diagram (4)

To illustrate the performance of this technique, consider the following example, $T_g=N=128$, $SNR=20dB$, channel decay factor $\alpha=10$, $M_s=4$, and the sounding signal has frequency domain subcarrier amplitudes with equal magnitude and randomly chosen bi-polar phase. The timing of the estimation point n_0 and the sounding symbols for each of the channels is as in the diagrams above. In Fig. 5, $f_d T=0$, so the channels are not changing with time.

The top curve in Fig. 5 is the estimation performance of all four of the channels $h_{ij}(n_0)$ with $M_s=4$. The bottom curve is shown for comparison. It is the performance when just one sounding symbol is used, $M_s=1$. We see that the estimation performance for all four channels is exactly the same when $f_d T=0$. We see that the estimation performance for all four channels is exactly the same when $f_d T=0$. This is because the channel is not changing so that all of the sounding symbols give equally reliable


information about $h_{ij}(n_0)$, regardless of their timing relative to n_0 . This figure also shows that the performance for $M_s=4$ is about 6 dB better than for $M_s=1$. This is because the channel is coherently combined over the four sounding symbols, while the noise is independent, so that we get a factor of 4(6dB) improvement.

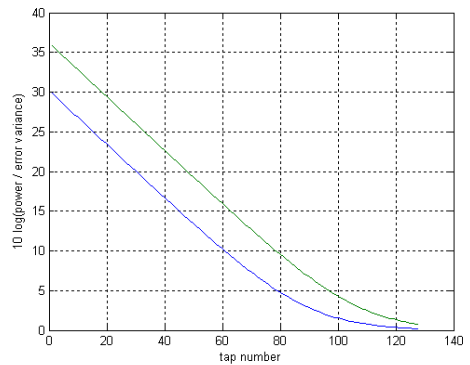

[Fig. 5] Four symbol vs. One symbol with $f_d T=0$

$f_d T$ product and on the number of transmit and receive antennas. For a given $f_d T$ product, if the number of antennas dictates that the interval between sounding bursts per channel is too high for good performance.

Fig. 10 shows the comparison of the MMSE estimator vs. the correlator estimator for the channel $h_{42}(n)$. The correlator simply uses the average of the correlations from the four probes of the $h_{42}(n)$ channel, since it does not exploit any information about the time variation in the channel. It simply operates as if the channel were time static.

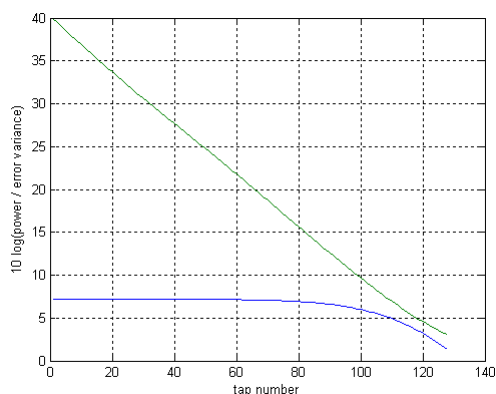

[Fig. 10] MMSE vs. Correlator of $h_{42}(n)$ with $f_d T = 0.005$.

5. Conclusions

In this work, we suggested the idea of interpolating between multiple sounding bursts in order to estimate all the individual channels of a MIMO scenario. We showed that the performance of the proposed technique depends on $f_d T$ product and on the number of transmit and receive antennas. Especially, it is shown that this technique can be effective if the $f_d T$ product is not too high and the number of antennas is not too large. It is also shown that there is considerable performance difference for the 16 channels in the 4x4 MIMO case because the sounding bursts are spread farther apart in time so the Doppler in the channel causes greater error for the channels.

References

- [1] A. Goldsmith, S. A. Jafar, N. Jindal, and S. Vishwanath, "Capacity limits of mimo channels," IEEE J. Sel. Areas Commun., vol. 21, no. 5, pp. 684 - 702, Jun. 2003.
DOI: <http://dx.doi.org/10.1109/JSAC.2003.810294>
- [2] G. L. Stuber, Principles of Mobile Communication, 2nd ed. Norwell, MA: Kluwer Academic Publishers, 2001.
- [3] M. K. Simon and M.-S. Alouini, Digital Communication over Fading Channels, 2nd ed. New York, NY: John Wiley & Sons, 2005.
- [4] K. Rajawat and A. K. Chaturvedi, "Near Optimal Training Sequences for Low Complexity Symbol Timing Estimation in MIMO Systems," IEEE Trans. Commun., vol. 58, no. 1, pp. 281-288, Jan. 2010.
DOI: <http://dx.doi.org/10.1109/TCOMM.2010.01.080537>
- [5] S. B. Weinstein and P. M. Ebert, "Data transmission by frequency division multiplexing using the discrete fourier transform," IEEE Trans. Commun., vol. 19, pp. 628-634, Oct. 1971.
DOI: <http://dx.doi.org/10.1109/TCOM.1971.1090705>
- [6] D. Hu, L. Ynag, Y. Shi, and L. He, "Optimal Pilot Sequence Design for Channel Estimation in MIMO OFDM Systems," IEEE Trans. Commun. Lett., vol. 10, no. 1, pp. 1-3, Jan. 2006.
DOI: <http://dx.doi.org/10.1109/LCOMM.2006.1576550>
- [7] Y. Li, H. Minn, N. Al-Dhahir, and A. R. Calderbank, "Pilot Designs for Consistent Frequency-Offset Estimation in OFDM Systems," IEEE Trans. Commun., vol. 55, no. 5, pp. 864-877, May 2007.
DOI: <http://dx.doi.org/10.1109/TCOMM.2007.896105>
- [8] Hlaing Minn and Naofal Al-Dhahir, "Optimal Training Signals for MIMO OFDM Channel Estimation," IEEE Trans. Wireless Commun., vol. 5, no. 5, pp. 1158-1168, May 2006.
DOI: <http://dx.doi.org/10.1109/TWC.2006.1633369>
- [9] W. Zhang, X.-G. Xia and P. C. Ching, "Optimal Training and Pilot Pattern Design for OFDM Systems in Rayleigh Fading," IEEE Trans. Broadcasting, vol. 52, no. 4, pp. 505-514, Dec. 2006.
DOI: <http://dx.doi.org/10.1109/TBC.2006.884001>
- [10] Yang-Seok Choi, Peter J. Voltz, and Frank A. Cassara, "On Channel Estimation and Detection for Multicarrier Signals in Fast and Selective Rayleigh," IEEE Trans. Commun., vol. 49, no. 8, pp. 1375-1387, Aug. 2001.
DOI: <http://dx.doi.org/10.1109/26.939860>

- [11] Yi Jiang, Varanasi, M.K, and Jian Li, "Performance Analysis of ZF and MMSE Equalizers for MIMO Systems: An In-Depth Study of the High SNR Regime," IEEE Trans. Inf. Theory, vol. 57, no. 4, pp. 2008 - 2026, 2011.

DOI: <http://dx.doi.org/10.1109/TIT.2011.2112070>

Seyeong Choi

[Regular member]



- Feb. 1998 : Hanyang Univ., MS
- Aug. 2007 : Texas A&M Univ., PhD
- Sept. 2008 ~ Feb. 2010 : LG Electronics, Engineer
- Mar. 2010 ~ current : Wonkwang Univ., Dept. of Infor. & Commun. Eng, Assistant Professor

<Research Interests>

Wireless Mobile Communications

Jun-Ho Jo

[Regular member]



- Feb. 1999 : Korea Univ., BS
- May 2001 : NYU Polytech., MS
- Jan. 2008 : NYU Polytech., PhD
- Jan. 2008 ~ Aug. 2011 : LG Electronics, Engineer
- Aug. 2011 ~ current : KT, Manager

<Research Interests>

Wireless Mobile Communications